

4

3


2

1

REVISIONS

ZONE	LETTER	DESCRIPTION	DATE	CHECKED	APPROVED


SHOWN AT MID-STROKE

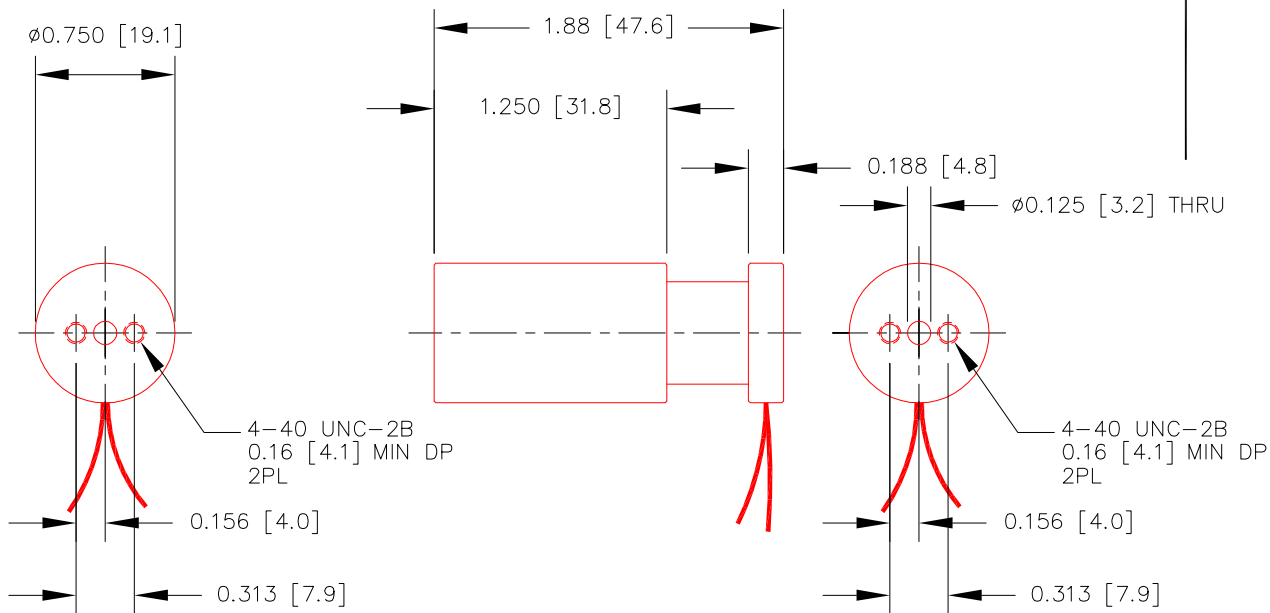

INTERMITTENT FORCE @10% DUTY CYCLE	6.5 N	23.3 OZ
CONTINUOUS FORCE	2.1 N	7.4 OZ
FORCE CONSTANT	1.8 N/A	6.5 OZ/A
BACK EMF CONSTANT	1.8 V/M/S	0.05 V/IN/S
STROKE	22.2 mm	0.875 IN
COIL CLEARANCE PER SIDE	0.38 mm	0.015 IN
COIL ASSY MASS	14 GR	0.49 OZ
BODY MASS	48 GR	1.7 OZ
COIL RESISTANCE	4.6 Ohms	
COIL INDUCTANCE @ 1000 Hz	0.86 mH	
MAX CONTINUOUS POWER	6.0 W	

ALL VALUES AT 25°C

NOTES :
UNLESS OTHERWISE SPECIFIED

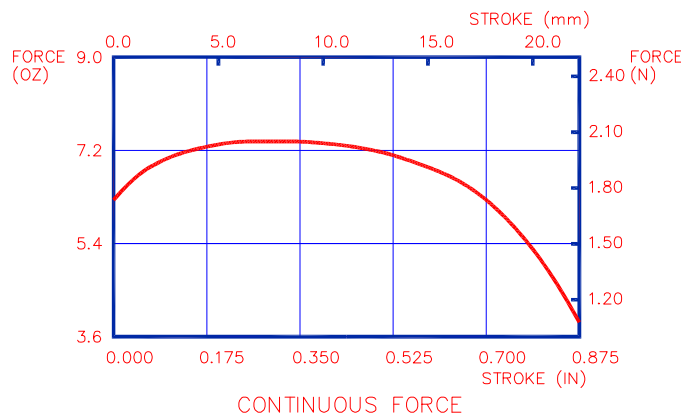

THIS DOCUMENT, WHETHER OR NOT MARKED AS PROPRIETARY, IS CONSIDERED CONFIDENTIAL AND SHALL REMAIN THE PROPERTY OF MOTICONT AND SHALL BE RETURNED TO MOTICONT UPON REQUEST WITH ALL COPIES MADE THEREOF. THIS DOCUMENT CANNOT BE UTILIZED IN THE MANUFACTURE OF ARTICLES SOLD OR OFFERED OR DISCLOSED TO ANYONE AND NO USE OF IT CAN BE MADE UNLESS EXPRESSLY AUTHORIZED BY AND UNDER THE DIRECTION OF MOTICONT. POSSESSION OF THIS DOCUMENT IS ACCEPTED SUBJECT TO THE FOREGOING.

DIMENSIONS ARE IN INCHES (mm) TOLERANCES ON: DECIMALS FRACTIONS ANGLES .XXX .XX ± 1/125 ± 1/2' ± .005 ± .01 UNLESS OTHERWISE SPECIFIED		MATERIAL	CONTRACT		motiCont LINEAR VOICE COIL MOTOR		
USED ON		FINISH	DRN				
NEXT ASSY			CHKD		DWG. NO.		REV.
APPLICATION			APPVD		HVCM-019-032-003-02		1
			APPVD		SCALE: 1 / 1		SHEET 1 OF 1

4

3

2

1